


Aqua Pressure Wash Hose

A Decade of Reliability for Cleaning Operations!

4000 PSI Smooth Cover
Standard and High Temp
Bulk reels or hose assemblies

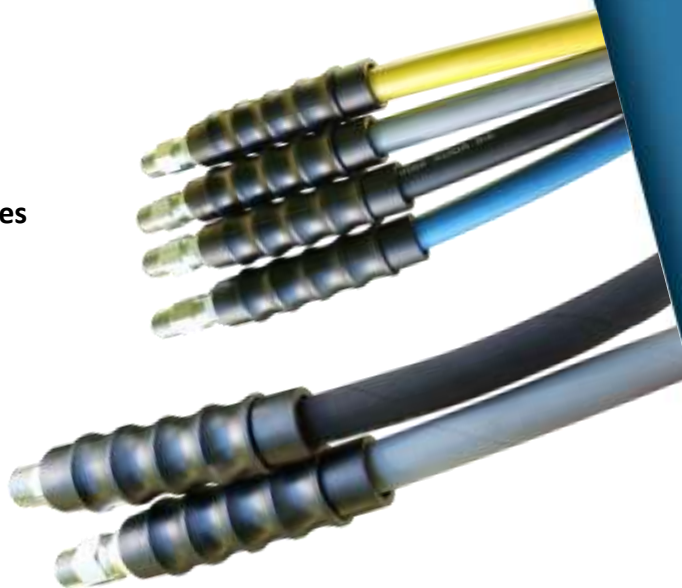

6000 PSI Rugged Cover
Standard Temp
Bulk reels or hose assemblies

A qualified, economical choice for trouble free functionality on the job!



Available 14MM swivel end crimp connections for gas powered lower pressure washers on thermoplastic or rubber hose

Plastic cap providing thread protection shipped on every hose assembly we ship!



Heavy Duty Hose Guards with Finger Grip Ends

Assemblies are NPT solid by swivel connections.

Aqua 4000 PSI Standard Temp

Tube: Synthetic Rubber

Reinforcement: 1 Wire Braid

Cover: Smooth, Abrasion and Oil Resistant

Temp: -20°F (29°C) to +250°F (121°C)



Part #	I.D.		O.D.		Weight		Min Bend Radius (in)
	(in)	(mm)	(in)	(mm)	Lbs/ft	Kg/ft	
Colors Available							
BLK, BLU	1/4	6.7	0.484	12.3	0.14	0.06	2.0
BLK, BLU, GRA, YEL	3/8	9.8	0.681	17.3	0.22	0.10	2.5
BLK, BLU	1/2	12.8	0.740	18.8	0.27	0.12	3.5



Aqua 4000 PSI High Temp

Tube: Synthetic Rubber

Reinforcement: 1 Wire Braid

Cover: Smooth, Abrasion and Oil Resistant

Temp: -20°F (29°C) to +310°F (154°C)



Part #	I.D.		O.D.		Weight		Min Bend Radius (in)
	(in)	(mm)	(in)	(mm)	Lbs/ft	Kg/ft	
Colors Available							
BLK	3/8	9.8	0.681	17.3	0.22	0.10	2.5


Aqua 6000 PSI Standard Temp

Tube: Synthetic Rubber

Reinforcement: 2 Wire Braid

Cover: Smooth, Abrasion and Oil Resistant

Temp: -20°F (29°C) to +250°F (121°C)

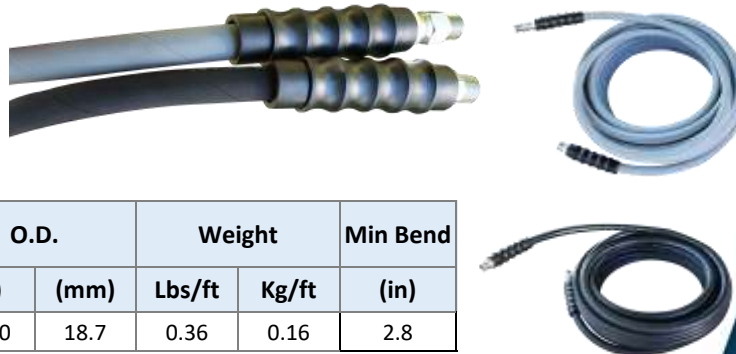

Part #	I.D.		O.D.		Weight		Min Bend Radius (in)
	(in)	(mm)	(in)	(mm)	Lbs/ft	Kg/ft	
Colors Available							
BLK, GRA	3/8	9.8	0.740	18.7	0.36	0.16	2.8

Not recommended for steam applications.