


# High Pressure PTFE Hose Assemblies

Assembled in Ontario for quick turn-around!



Fluid Hose assemblies light weight high pressure PTFE hose. The versatile characteristics of PTFE lend it to being a premium choice for high heat, high pressure and high corrosion resistance! Available in assembled form only with these custom options.....

- Silicone Pyro-Jacket
- Metal guarding
- Fiberglass covers
- Color coded ends
- PTFE cover for added corrosion resistance
- All combined!

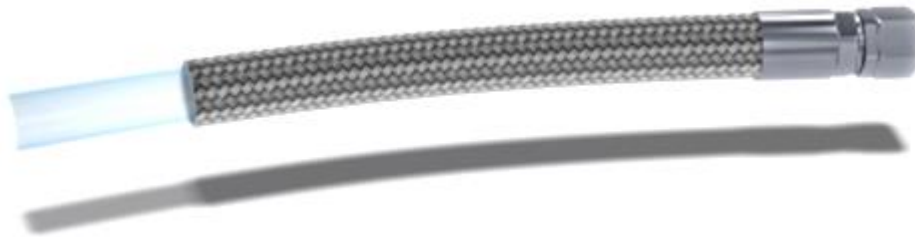

**Tube:** Smooth Bore Antistatic PTFE  
**Reinforcement:** High Tensile 304 Stainless Steel Braiding  
**Temp:** -60°F (76°C) to +500°F (260°C)  
**Package:** Assemblies Only  
**End Connections Available:** Female JIC (no jump sizes)  
**Country of Origin:** USA

Part #	I.D.		O.D.		Working Pressure		Burst Pressure		Min Bend Radius (in)
	(in)	(mm)	(in)	(mm)	PSI	bar	PSI	bar	
SSPT-HP-04	0.222	5.6	0.457	11.6	5,000	345	16,000	1,103	1.5
SSPT-HP-06	0.308	7.8	0.555	14.1	5,000	345	16,000	1,103	2.5
SSPT-HP-08	0.401	10.2	0.692	17.6	5,000	345	16,000	1,103	2.9
SSPT-HP-12	0.617	15.7	1.072	27.2	5,000	345	16,000	1,103	4.0
SSPT-HP-16	0.867	22.0	1.352	34.3	5,000	345	16,000	1,103	5.0

NOT RECOMMENDED FOR HIGH PRESSURE GASES